

INSTALLER SUPPLIED LOW VOLTAGE TERMINALS (24V NOMINAL)

SELECT LOW or LINE VOLTAGE INCOMING POWER TO DCC, NOT BOTH


RELAY CONTROL WIRING TERMINALS. CONNECT TO COM & N/C. DO NOT USE SOLID CORE WIRE

INSTALLER SUPPLIED OPTIONAL LINE VOLTAGE (90-240 VAC, 50-60 HZ)

NO INTERNAL SENSOR



ART WITH AN INFRARED REFRIGERANT SENSOR

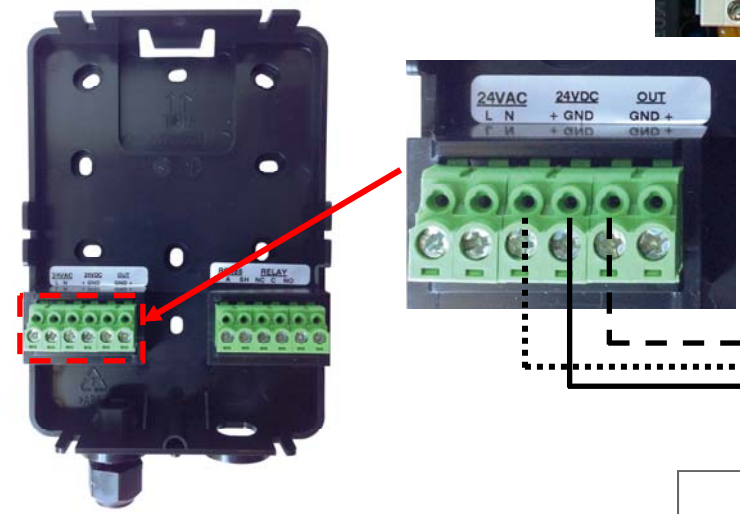

THIS DCC-B-RT / ART COMBINATION MAKES A ONE CHANNEL GAS DETECTION SYSTEM FOR MONITORING A REFRIGERANT (OR GROUP OF REFRIGERANTS) WITH AN INFRARED SENSOR.

CRITICAL ENVIRONMENT TECHNOLOGIES CANADA INC.
 www.critical-environment.com
 DCC-B-RT WITH ART INFRARED TRANSMITTER WIRING CONNECTION PHOTO DRAWING
 April 6, 2016