



DCC & RSH-24V REMOTE STROBE & HORN COMBO (24VDC)



INSTALLER SUPPLIED  
24VDC (NOMINAL) POWER

24VDC POSITIVE (+)

24VDC NEGATIVE (-)

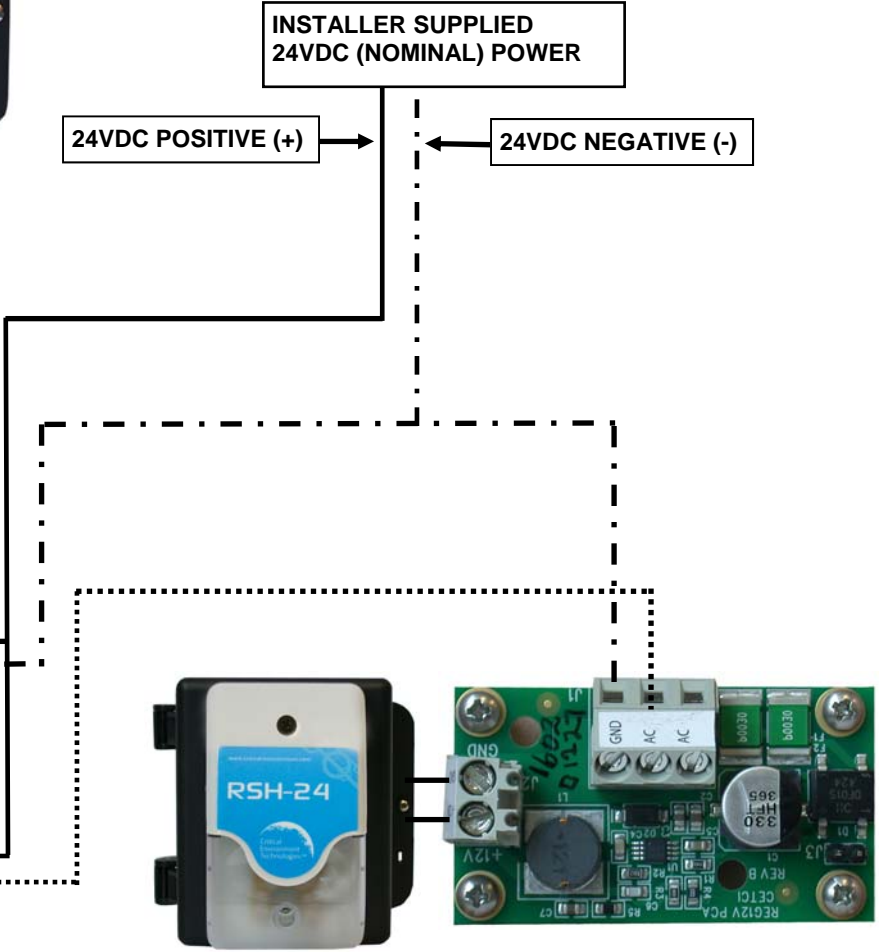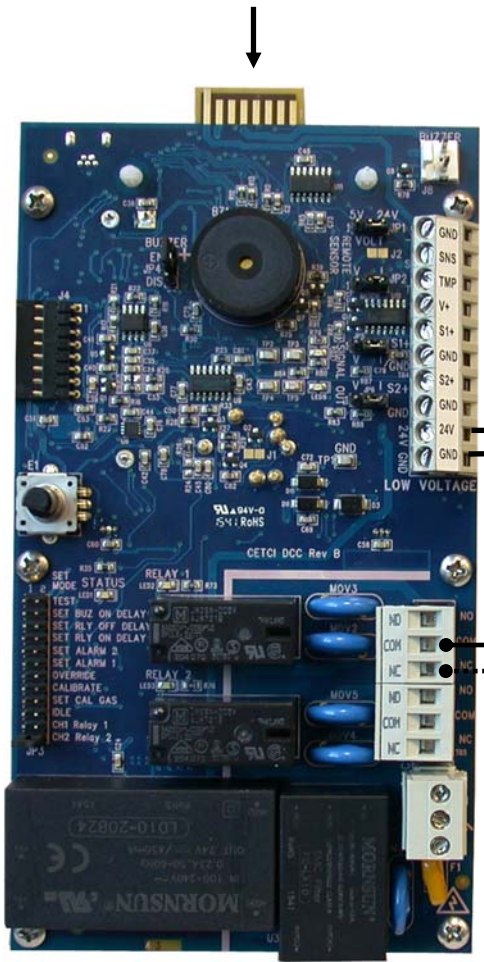

LINE VOLTAGE WIRING  
TERMINAL  
NOT CONNECTED

**NOTE:** Two SPDT dry contact relays, including VFD control, rated 5 amps @ 240 VAC  
RELAYS OPERATE IN FAIL SAFE CONFIGURATION.

**NOTE:** DO NOT RUN LINE VOLTAGE AND LOW VOLTAGE WIRES IN THE SAME CONDUIT.

CRITICAL ENVIRONMENT TECHNOLOGIES CANADA INC.	
NAME:	WIRING CONNECTIONS—24VDC POWER SUPPLY
MODEL:	All DCC Models with RSH-24V
DATE:	March 21, 2016



**DCC & RSH-24V REMOTE STROBE & HORN COMBO (LINE VOLTAGE)**



**INSTALLER SUPPLIED  
24VDC (NOMINAL) POWER**

**24VDC POSITIVE (+)**

**24VDC NEGATIVE (-)**

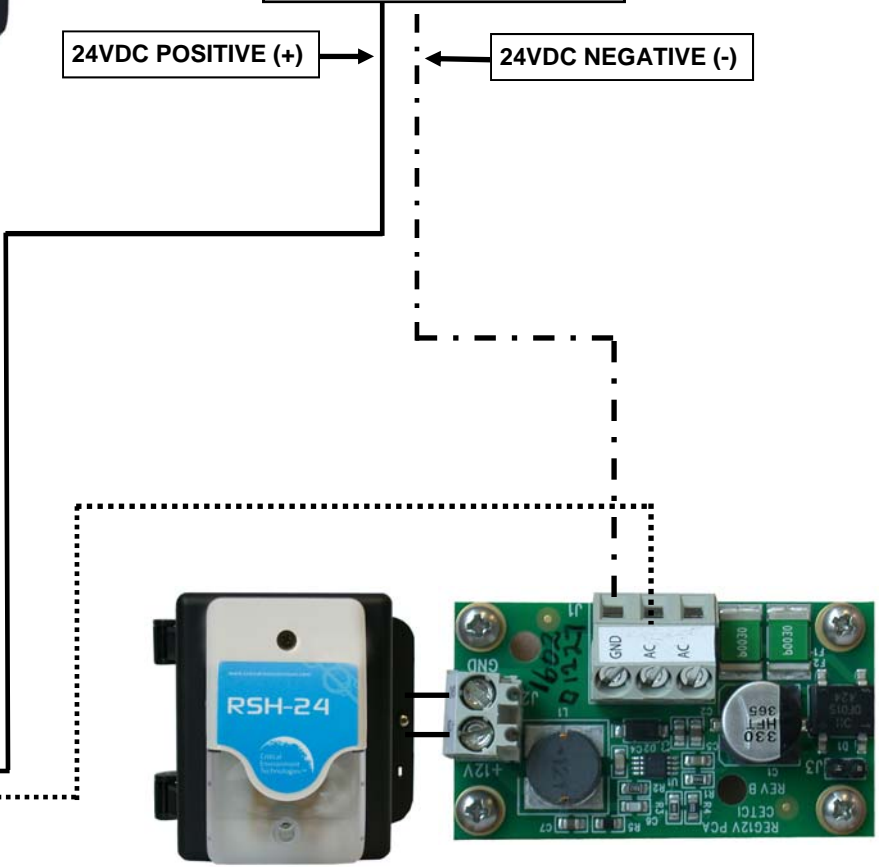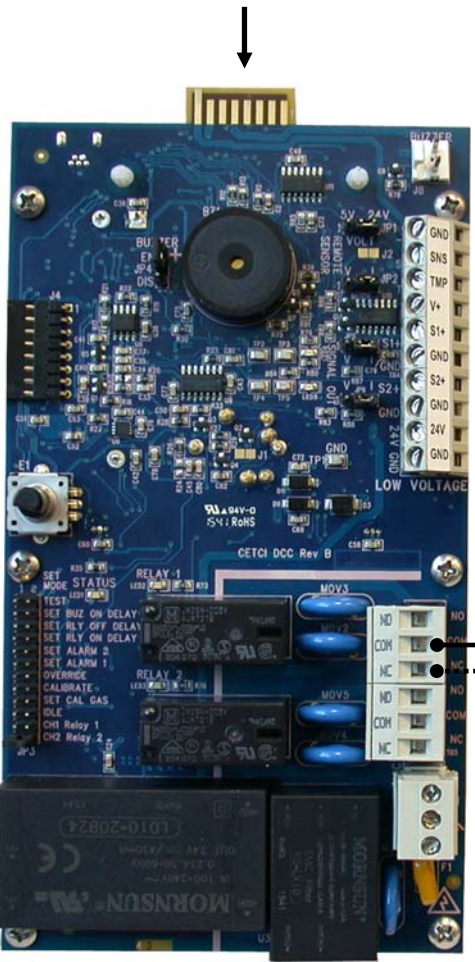

**NOTE:** Two SPDT dry contact relays, including VFD control, rated 5 amps @ 240 VAC  
RELAYS OPERATE IN FAIL SAFE CONFIGURATION.

**NOTE:** DO NOT RUN LINE VOLTAGE AND LOW VOLTAGE WIRES IN THE SAME CONDUIT.

<b>CRITICAL ENVIRONMENT TECHNOLOGIES CANADA INC.</b>	
<b>NAME:</b>	WIRING CONNECTIONS– LINE VOLTAGE SUPPLY
<b>MODEL:</b>	All DCC Models with RSH-24V
<b>DATE:</b>	March 21, 2016